


Thanks for buying the COPILOT FX CARACOL:

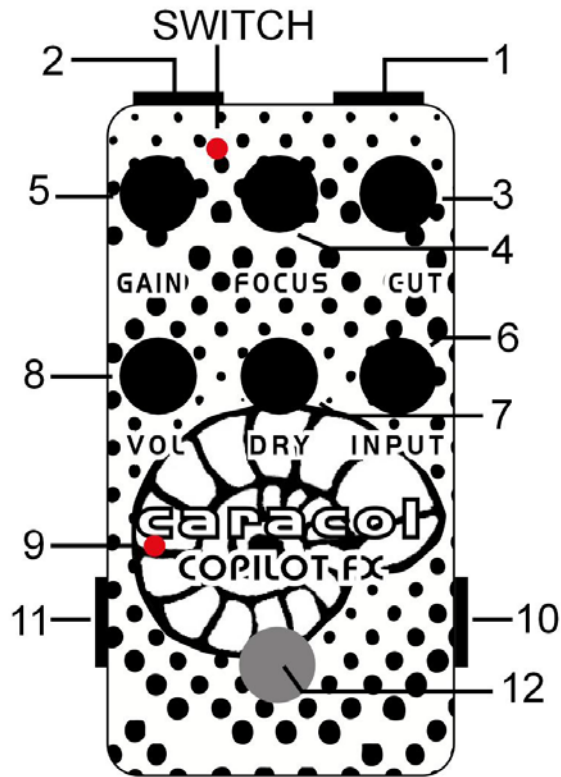

How to use it:

Switch: changes the mode of the pedal to the right is normal (previous 4 knobber version) to the left is a fuzzer/gainer mode

- 1- Input Jack: signal from your instrument or output from another pedal.
- 2- Output Jack: Output to other FX pedal or Amplifier
- 3- CUT: this knob used to be the toggle switch on the previous version, now it allows shaping the fuzz section, and reducing the nasally filtered tones. Works with the gain and focus.
- 4- FOCUS: Tune to set the frequency that passes and are filtered to the octave section.
- 5- Gain: Sets the intensity of the octave fuzz.

- 6- Input: Adds signal to the circuit, at minimum the decay is very quick, increasing clockwise adds more sustain.
- 7- DRY (no labeled) Adds DRY signal to the overall balance of the output
- 8- VOL: Adds octave fuzz to the overall balance of the output.
- 9- Led Indicator: when is on, the output will be the caracol, when off the pedal is Bypassed)
- 10- Control Input: Allows you to use external sound sources to modulate (the switch needs to be set to the right in normal mode to work), you can plug another guitar, bass, keyboard, synths, apps from your phones, tablets, radios, etc
- 11- Power Jack: 9v adapter input, 9v center negative 10mA or higher
- 12- Bypass Footswitch: Activates the pedal.

For help, comments, suggestions, complaints please email me at:

adam@copilotfx.com

For info please visit:

www.copilotfx.com

www.facebook.com/copilotfx